




■ Dimension available ■

Specification	Thickness of the matrix (mm)	Thickness of the wear resistant layer (mm)	Total thickness (mm)	Hardness (mm)	Length(mm)×width(mm)
WA3+3	3	3	6	52~55	1420mm×3020mm 1400mm×3000mm 1800mm×3000mm 2200mm×3000mm 2350mm×3100mm
WA5+3	5	3	8	52~55	
WA6+4	6	4	10	55~58	
WA6+6	6	6	12	58~60	
WA8+4	8	4	12	58~60	
WA8+6	8	6	14	58~61	
WA10+8	10	8	18	58~61	
WA10+10	10	10	20	58~61	
WA10+12	10	12	22	58~61	
WA10+20	10	20	30	58~61	

- 1、The common specification is provided as above. Customization based on customers' requirements is also available.
- 2、The length direction is the direction of weld bead.

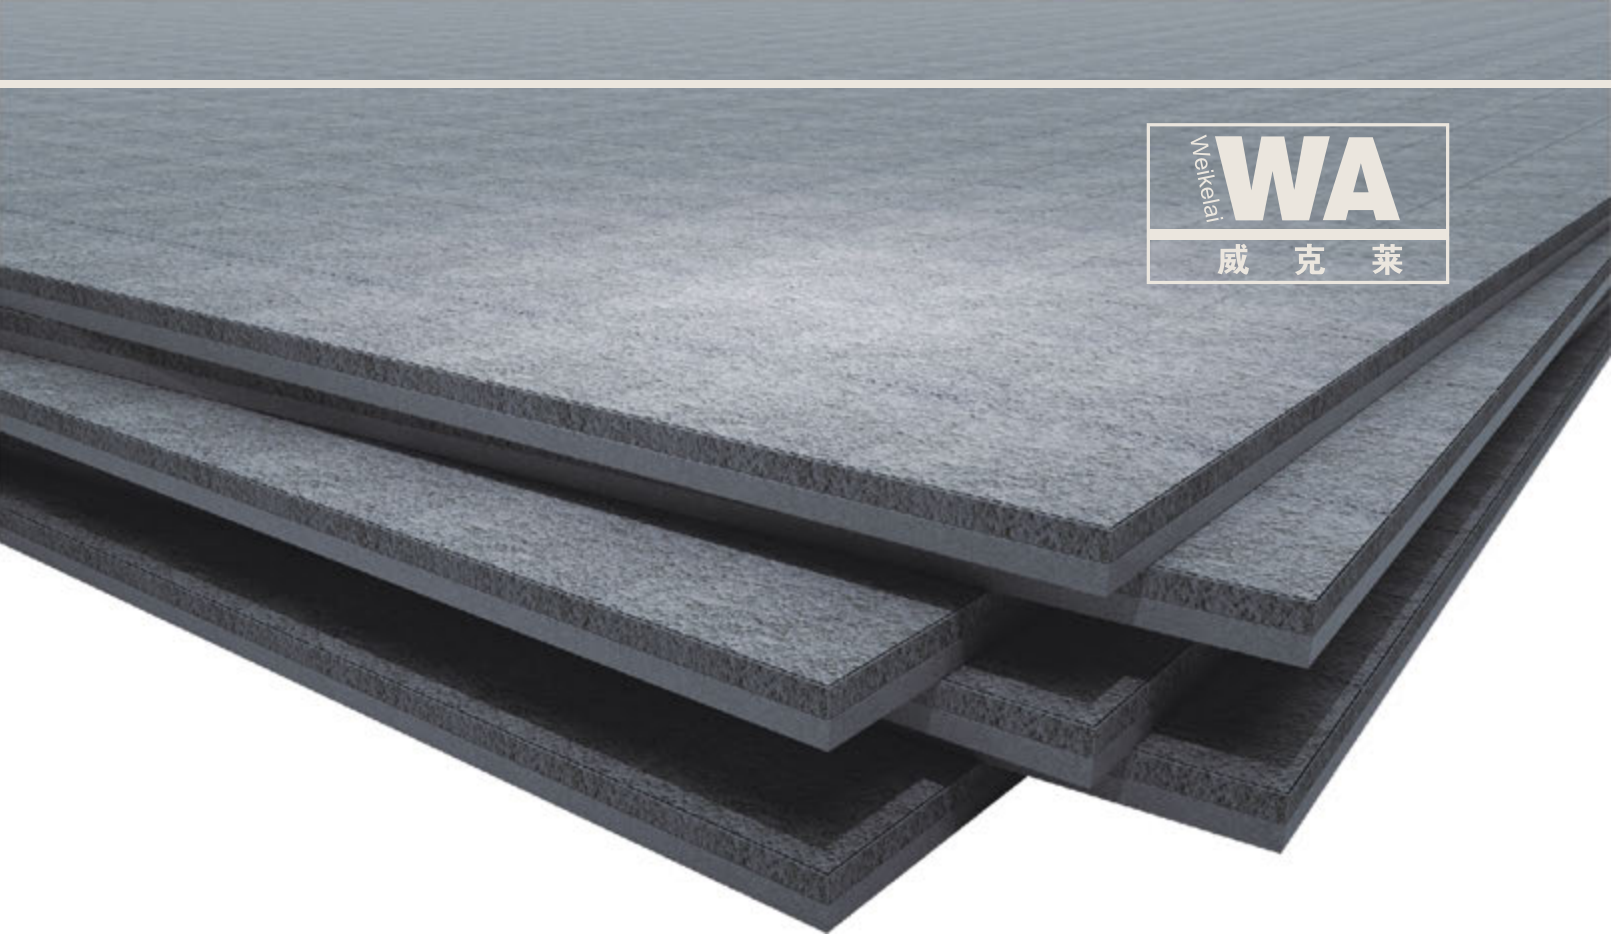